International Journal of Scientific Research & Engineering Trends
Volume 7, Issue 2, March-April-2021, ISSN (Online): 2395-566X

Performance Enhancement of Leaf Spring Using Design Optimization

M.Tech. Scholar Abhishek Chandra, Prof. G.R. Kesheorey (Supervisor & HOD), Dr. A.J. Siddiqui (Executive Director)
Department of ME,
Vindhya Institute of Technology & Science, Indore
abhishekchandra56@gmail.com, grkvitsin@gmail.com

***Abstract*- Leaf spring is one of the potential parts for weight reduction as it accounts for 10% - 20% of the unsprung weightand thereforegood scope of work lies in its design optimization for weight reduction. This current research investigates the application of Taguchi Response Surface Optimization in optimizing dimensions of mono leaf spring. Initial FEA analysis is conducted using ANSYS software to determine to determine stresses, deformation and strain energy of mono leaf spring.Design of leaf spring is optimized using Taguchi design of experiments scheme generating 3D response surfaces, sensitivities, goodness of fit curves. The optimization parameter considered for analysis are spring inner radius and spring outer radius while the output parametersare equivalent stress, mass and deformation.**

***Keywords*- FEA, mono leaf spring, ANSYS.**

I.INTRODUCTION

Semi- elliptic leaf springs are almost universally used for suspension in light and heavy commercial vehicles. For cars also, these are widely used in rear suspension. The spring consists of a number of leaves called blades. The blades are varying in length. The blades are usually given an initial curvature or cambered so that they will tend to straighten under the load.

The leaf spring is based upon the theory of a beam of uniform strength. The lengthiest blade has eyes on its ends. All the bladesare bound together by means of steel straps. The introduction of composites helps in designing a better suspension system with better ride quality if it can be achieved without much increase in cost and decrease in quality and reliability.

In the design of springs, strain energy becomes the major factor. In the present scenario the main focus of automobile manufacturers is weight reduction of the automobile. Weight reduction can be achieved mainly by introducing the better material, design optimization and better manufacturing processes.

II. LITERATURE REVIEW

Mahmood M. shokrieh and Davood Rezaei [1] examined plan, examination and improvement of leaf spring. In their examination they have supplanted a steel leaf spring by a composite one. Essential focus of their examination was to structure a spring that have least weight and is fit for bearing a given static outer power with no disappointment. Using the outcomes acquired for steel leaf spring they planned a composite leaf spring considering spring geometry streamlining made of fiberglass with epoxy tar with pressure and removal as structure requirements. They dissected this spring using ANSYS and checked their outcomes with exploratory outcomes and of limited component arrangement of same measurements. They found that composite leaf spring weigh 80% less and stress created is likewise less contrasted with steel leaf spring. The composite leaf spring common recurrence is observed to be higher that of steel leaf spring.

Ajitabh Pateriya, Mudassir Khan [2] studied dynamic characteristics of spring loaded using ANSYS. Fluid-solid interaction mesh deformation between the valve disc and surrounding fluid has been used to study the motion of the valve disc for different materials. Different materials have been used considering similar boundary condition for finding the best suitable material. FEM analysis result shows that La2Zr2O7 is best suitable material. Maximum shear stress considered is 0.20395 MPa which is greater for Aluminium alloy. For weight and cost comparison the Aluminium alloy material should be preferred.

Pozhilarasu V. furthermore, T Parameshwaran Pillai [3] considered investigation of steel and composite leaf spring. They thought about the customary leaf spring and composite (Glass fiber fortified plastic – GFRP) leaf spring. They utilized ANSYS programming for examining traditional steel leaf spring and composite leaf spring for comparable conditions. They created a glass/epoxy composite leaf spring utilizing hand layup technique. The all-inclusive testing machine has been utilized to test the aftereffects of ordinary steel and composite leaf spring. Under a similar static stacking condition redirection and

© 2021 IJSRET

worry of ordinary steel and composite leaf spring has been acquired and results demonstrates a wide contrast between the outcomes.

Aishwarya A.L., A. Eswara kumar, V. Balakrishna Murthy [4] directed free vibration investigation of composite leaf springs. They created a three-dimensional leaf spring on ANSYS. They examined the impact of variety of width, relative developments of the leaves, grinding between the spring leaves. They saw that grinding coefficient does not influence the outcomes. They saw that leaf width improves the characteristic recurrence.

T. N. V. Ashok Kumar, E. Venkateswara Rao, S. V. Gopal Krishna [5] directed structure and material streamlining of overwhelming vehicle leaf spring. They led their examination to discover the impact on removal, redirection, weight and frequencies. They utilized ANSYS to lead their examination and thought about their outcomes between steel leaf spring and composite leaf spring made of glass/epoxy and Kevlar/epoxy. They utilized layer stacking technique by changing the fortification plotted for 3 layers, 5 layers and 11 layers. They analyzed the weight of regular steel leaf spring with that of composite leaf spring and found a weight decrease of 27.5%.

III. OBJECTIVE

The objective of current research is to optimize dimensions of mono leaf spring using Taguchi Response Surface optimization. The material used for analysis is structural steel. The design point, responses and sensitivity plots generated from response surface optimization would enable to determine optimum dimensions of leaf spring.

IV. METHODOLOGY

The CAD model of mono leaf spring is modelled using dimensions as shown in figure 1 below. The CAD model is developed in ANSYS design modeler using sketch and extrude tools as shown in figure 1 below.

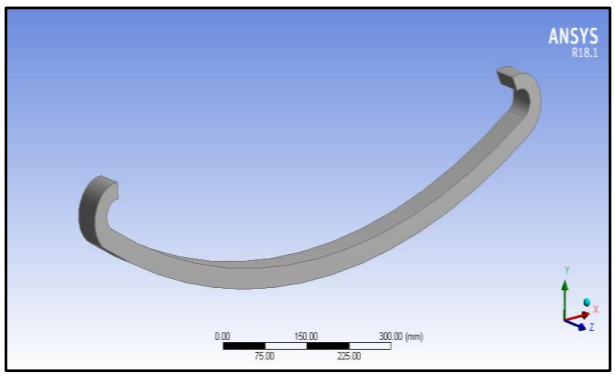

Fig 1. CAD model of mono leaf spring.

The CAD model imported in ANSYS is meshed using tetra elements as shown in figure 2 below. The model is meshed using adaptive size function, relevance order 100 and fine sizing. The transition is set to smooth, span angle centre set to coarse

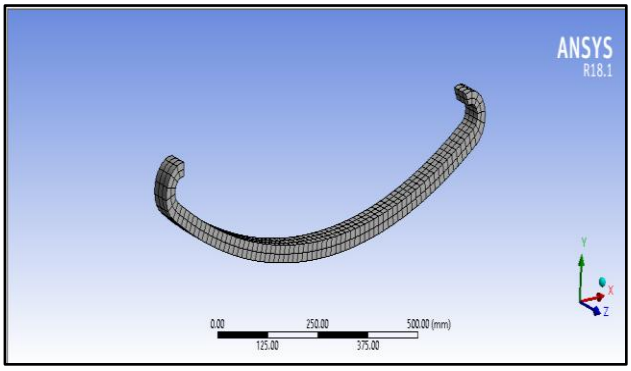

Fig 2. Meshed model of mono leaf spring.

The total number of elements generated is 474 and number of nodes generated is 3268. After meshing the CAD model is applied with appropriated loads and boundary conditions as shown in figure 3 below. The left end is applied with displacement support and right end of mono leaf spring is applied with remote displacement keeping Rotz degree of freedom free and other degree of freedom restricted. The load is applied in mid face of mono leaf spring.

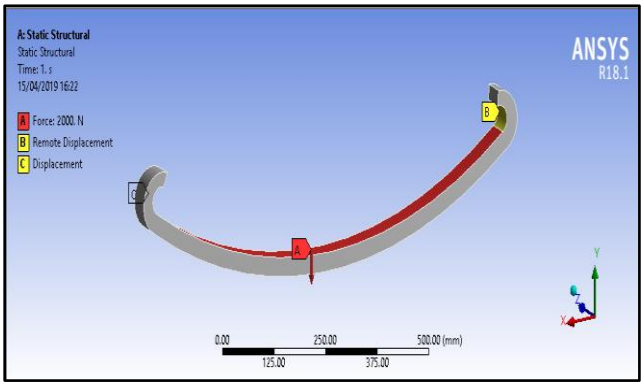

Fig 3. Applied loads and boundary conditions.

Software carries out matrix formulations, matrix multiplications, formulation of element stiffness matrices, assembly of global stiffness matrix. Results are calculated at nodes and interpolated for entire element edge length.

Analytical calculation of stress,
For "n" number of leaves, the stress can be written as,

$$\sigma = \frac{M}{z} = \frac{6 * w * L}{n * b * t^2} \qquad (1)$$

where ,
w is weight of leaf spring
L is span length
n is number of graduated leafs
b is width of leaf spring

© 2021 IJSRET

t is thickness of leaf spring

After conducting FEA analysis, the dimensions of leaf spring are optimized using response surface optimization which is a collection of mathematical and statistical techniques useful for analyzing problems where several independent variables influence a dependent variable or response, and the goal is to optimize this response. We denote the independent variables by X1, X2, X3, X4……. Xn.

The response, 'v' is assumed to be a random variable. RSM is used for the design and analysis of experiments; it seeks to relate an average response to the value of quantitative variables that effect response.

The relationship between the dependent variable and independent variables can be represented as;

$$y = f(X_1, X_2, X_3, X4\ldots\ldots X_n) + \varepsilon$$

where, ε represents the noise or error observed in the response 'y'.

If we denote the expected response by;

$$E(y) = f(X1, X2, X3, X4\ldots\ldots Xn) = \eta$$

then, the surface represented by;

$$f(X1, X2, X3, X4\ldots\ldots Xn) = \eta$$

is called the response surface.

The input parameters selected for optimization are shown in table 4.3 below.

Table 1. Input variables for optimization.

X_1 (H12)	Inner radius
X_2 (H14)	Outer radius

V. RESULTS AND DISCUSSION

After conduction of FEA analysis the 9 different design points are generated using response surface method. These design points are generated from combination of optimization parameters i.e. inner radius and outer radius. The software carries out analysis at these design points and generates equivalent stress, strain energy, deformation and mass as shown below fig 4.

After response surface optimization the maximum and minimum values of output parameters are generated as shown in figure 5.8 above. The mass minimization is achieved with magnitude of 9.08Kg and maximization is 18.293 Kg under specified limit of inner radius and outer radius.

Table of Schematic B2: Design of Experiments (Optimal Space-Filling Design : Max-Min Distance : Maximum Number Of Cycles = 10 : CCD Samples : Random Generator Seed = 0)

	A	B	C	D	E	F	G
1	Name	P8 - InnerRadius (mm)	P9 - OuterRadius (mm)	P5 - Equivalent Stress Maximum (MPa)	P6 - Strain Energy Maximum (mJ)	P7 - Total Deform... Maximum (mm)	P10 - Solid Mass (kg)
2	1	995.83	1021.7	185.91	99.597	9.7926	11.228
3	2	999.17	1023.9	202.15	111.44	11.159	10.842
4	3	988.17	1027.2	93.75	38.827	3.491	15.739
5	4	994.17	1026.1	127.35	58.536	5.5185	13.503
6	5	987.5	1020.6	119.2	52.991	4.9527	13.843
7	6	990.83	1022.8	126.95	57.988	5.4653	13.465
8	7	992.5	1028.4	98.783	41.744	3.7905	15.365
9	8	997.5	1028.3	135.95	64.333	6.1148	13.122
10	9	985.83	1025	88.849	36.165	3.2242	16.111

Fig 4. Design points generated using DOE.

The minimum strain energy achieved is with magnitude of 30.224mJ and maximum strain energy is 172.53mJ.

	A	B	C
1	Name	Calculated Minimum	Calculated Maximum
2	P5 - Equivalent Stress Maximum (MPa)	67.558	276.75
3	P6 - Strain Energy Maximum (mJ)	30.224	172.53
4	P7 - Total Deformation Maximum (mm)	2.8549	17.277
5	P10 - Solid Mass (kg)	9.0811	18.293

Fig 5. Maximum and minimum values of Output Parameters.

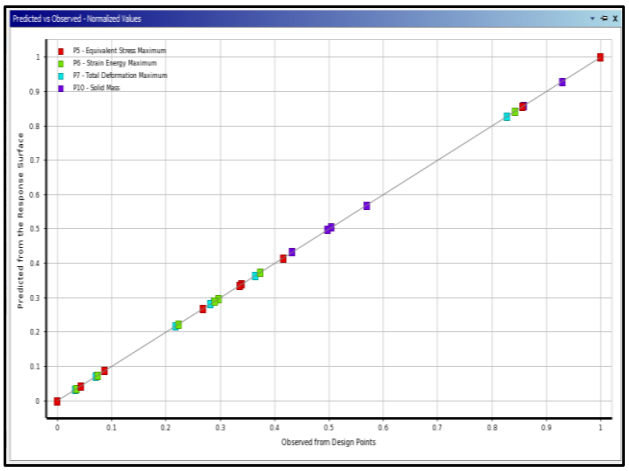

Fig 6. Goodness of fit curve.

© 2021 IJSRET

The goodness of fit curve shown in figure 5.10 above shows close proximity between observed values and predicted values values of equivalent stress, strain energy, total deformation and mass.

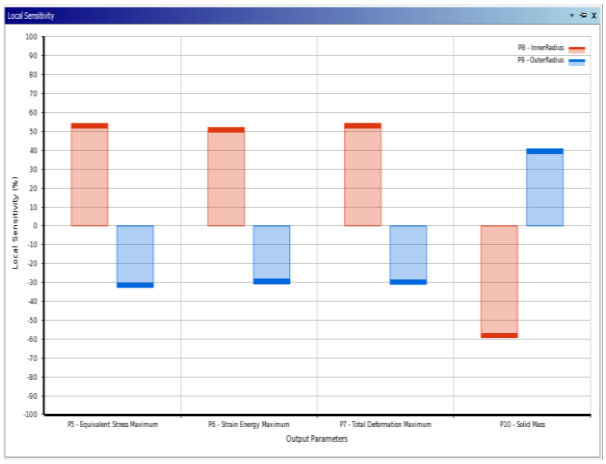

Fig 7. Sensitivity plot.

The sensitivity plot of different variables are shown in figure 5.11 above. The sensitivity plot shows positive sensitivity of inner radius for equivalent stress, strain energy and total deformation while shows negative sensitivity for solid mass. The sensitivity of inner radius is 54.19% positive for equivalent stress and outer radius shows 32.65% negative for equivalent stress.

The sensitivity of inner radius is 52.064% positive for strain energy and outer radius shows 30.78% negative for strain energy. The sensitivity of inner radius is 54.255% positive for deformation and outer radius shows 30.997% negative for deformation. The sensitivity of inner radius is 59.24% negative for mass and outer radius shows 40.75% positive for mass.

The 3D response surfaces are generated for different output variables i.e. equivalent stress, deformation and mass and input variables for analysis are inner radius and outer radius.

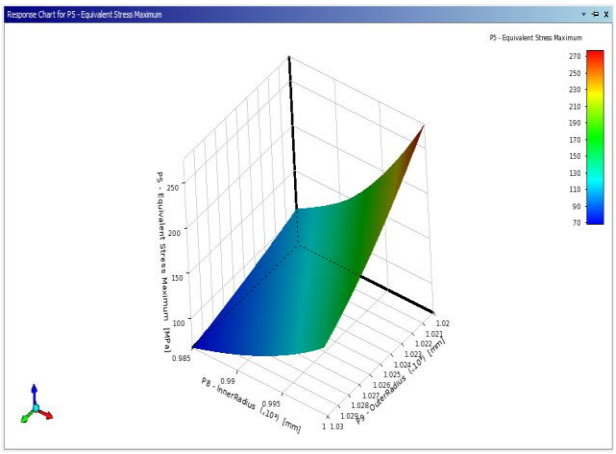

Fig 8. Response chart of equivalent stress.

The response of equivalent stress shows highest magnitude of 270MPa for outer radius range from 1020 mm to 1025mm and inner radius above 995mm. The minimum equivalent stress with magnitude of 70Mpa is attained at outer radius range of 1103mm to 1025mm and inner radius range from 985mm to 990mm.

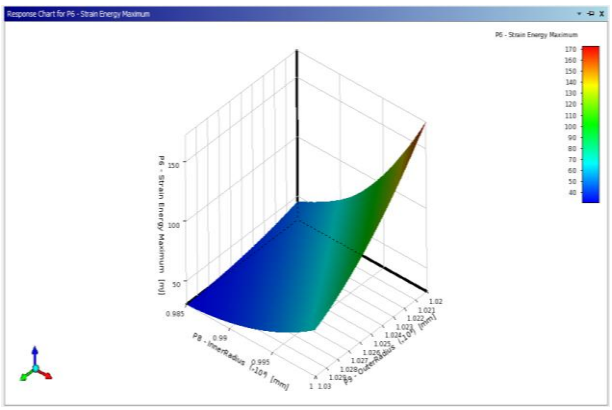

Fig 9. Response chart of strain energy.

The response of strain energy shows highest magnitude of 170mJ for outer radius range from 1020 mm to 1025mm and inner radius above 995mm. The minimum strain energy with magnitude of 40Mpa is attained at outer radius range of 1103mm to 1025mm and inner radius range from 985mm to 990mm.

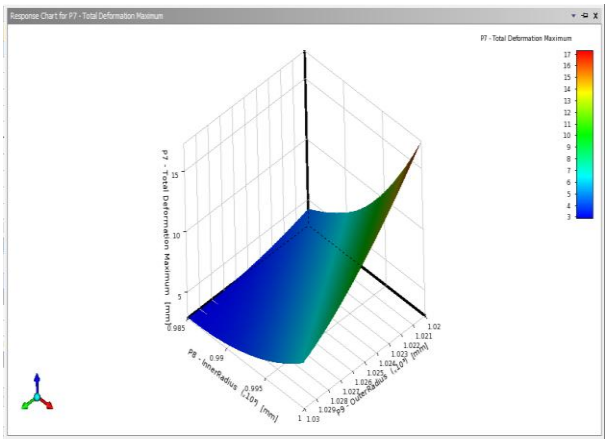

Fig 10. Response chart of total deformation.

The response of total deformation shows highest magnitude of 17mm for outer radius range from 1020 mm to 1025mm and inner radius above 995mm. The minimum deformation with magnitude of 3mm is attained at outer radius range of 1103mm to 1025mm and inner radius range from 985mm to 990mm.

The response of solid mass lowest magnitude of 9.5Kg and below for outer radius range from 1020 mm to 1025mm and inner radius above 995mm. The maximum solid mass with magnitude 17.5kg and more is attained at outer radius range of 1103mm to 1025mm and inner radius range from 985mm to 990mm.

© 2021 IJSRET

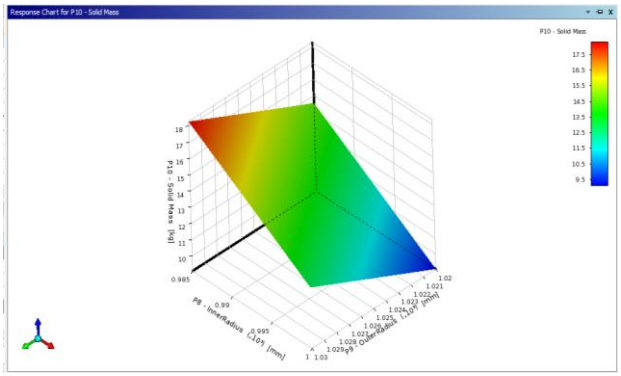

Fig 11. Response chart of solid mass.

VI. CONCLUSION

The FEA analysis of leaf spring is conducted using ANSYS software and results are analytically verified. For design optimization using response surface method inner radius and outer radius of leaf spring are selected as parameters for optimization.

The response surface plots are generated for deformation and equivalent stresses and strain energy. From response surface plots the range of magnitude of parameters (inner radius and outer radius) can be determined for maximum and minimum values of equivalent stress and deformation.

The details are as follows:
The equivalent stress plot as shown above shows the maximum value of 142.2MPa near vicinity of joints. While the remaining portion of leaf spring has almost same value of stress.The maximum deformation is seen on the end portion of leaf spring with value of 6.50mm and minimum deformation is seen on the other end of leaf spring near to supports.From design of experiments the sensitivity plot is generated shows positive sensitivity of inner radius for equivalent stress, strain energy and total deformation while shows negative sensitivity for solid mass. The sensitivity of inner radius is 54% positive for equivalent stress and outer radius shows 32% negative for equivalent stress.

The sensitivity of inner radius is 52% positive for strain energy and outer radius shows 30% negative for equivalent stress. The sensitivity of inner radius is 54% positive for deformation and outer radius shows 30% negative for deformation. The sensitivity of inner radius is 59% negative for mass and outer radius shows 40% positive for deformation.

The response of equivalent stress shows highest magnitude of 290MPa for outer radius range from 1020 mm to 1025mm and inner radius above 995mm. The minimum equivalent stress with magnitude of 70Mpa is attained at outer radius range of 1103mm to 1025mm and inner radius range from 985mm to 990mm. Using response surface optimization, nearly 27% weight reduction of leaf spring is observed.

REFERENCES

[1] Mahmood M. Shokrieh, Davood Rezaei, Analysis and optimization of a composite leaf spring, Composite Structures, 60 (2003) 317–325.
[2] Ajitabh Pateriya, Mudassir Khan, Structural and thermal analysis of spring loaded safety valve using FEM, International journal of mechanical engineering and robotics research, 4(1), 430-434.
[3] Pozhilarasu V. and T ParameshwaranPillai, Performance analysis of steel leaf spring with composite leaf spring and fabrication of composite leaf spring, International journal of engineering research and Science & Technology, 2(3), 102-109.
[4] Aishwarya A. L., A. Eswarakumar, V. Balakrishna Murthy, Free vibration analysis of composite leaf springs, International journal of research inmechanical engineering &technology, 4(1), 95-97.
[5] T. N. V. Ashok Kumar, E. Venkateswara Rao, S. V. Gopal Krishna, Design and Material Optimization of Heavy Vehicle Leaf Spring, International Journal of Research in Mechanical Engineering & Technology, 4(1), 80-88.
[6] Mahmood M. Shokrieh, Davood Rezaei, Analysis and Optimization of a Composite Leaf Spring, Composite Structures 60 (2003) 317–325, Elsevier Science Ltd.
[7] M. Venkateshan, D. Helmen Devraj, "Design and Analysis of Leaf Spring in Light Vehicles", IJMER 2249-6645 Vol.2, Issue.1, pp.213-218, Jan-Feb 2012.
[8] V. Pozhilarasu and T. Parameshwaran Pillai Analysis of Steel Leaf Spring with Composite Leaf Spring and Fabrication of Composite Leaf Spring", IJERST - ISSN 23195991 Vol. 2, No. 3, August 2013.
[9] Manjunath H.N, Manjunath.K, T.Rangaswamy, "Static Analysis and Fatigue Life prediction of Composite Leaf Spring for a Light Commercial Vehicle (TATA ACE), IJER ISSN:23196890) (online), 2347-5013 (print), Volume No.3, Issue No.7, pp: 422-425 01, July 2014.
[10] Mr. Nisar S. Shaikh, Prof. S.M. Rajmane, "Modelling and Analysis of Suspension System of TATA SUMO by using Composite Material under the Static Load Condition by using FEA, IJETT- ISSN: 2231-5381, Volume 12 Number 2, Jun 2014.

© 2021 IJSRET